



### 1. Name and Parts

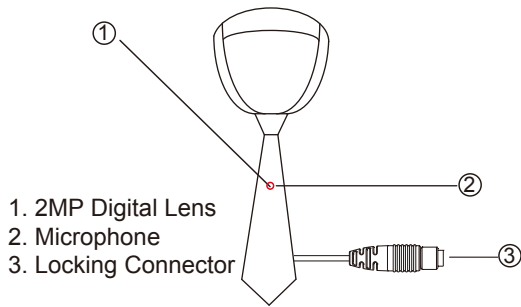

\* No microphones are available for USA market.

### 2. Package Content

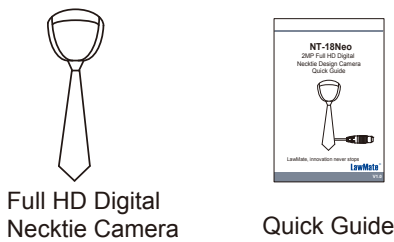


※ Do not remove serial number sticker!  
Warranty is invalid if the sticker is tampered.

1

### 3. Connect Necktie Covert Camera to a DVR

To connect the camera, fully plug the camera's connector end into the **Camera In** port on the DVR, then lock the connector firmly by rotating it to the direction of the red arrow.

- ※ Only connect the camera to DVR when system is turned off.
- ※ Make sure both camera and memory card are inserted into DVR before turning the system on.

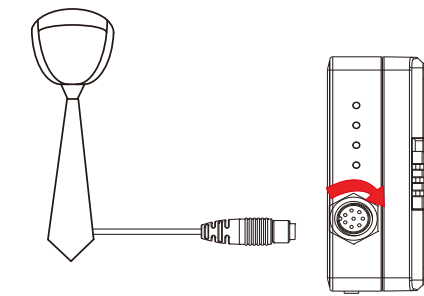

LawMate Portable DVR  
(Compatible with PV-500Neo & PV-500Neo Pro)

2


### 4. Specification

Built in Image Sensor	1/2.9" progressive CMOS Sensor
Sensor Resolution	2000x1121
Pixel Size	2.8um(H) * 2.8um(V)
Digital Picture Resolution	(H)1920x(V)1080
Sensor Sensitivity	0.03 Lux @ F 2.0
Lens F/No.	F2.0
Focal Length	4.3mm
Angle of view	78°
Depth of View	50 cm ~ ∞
Electronic Shutter	1/8 ~ 1/30,000
Video Output	I2C Data
Power Supply Current	220mA
Operating Temperature	-10°C ~ 60°C
Operating Humidity	20 ~ 90%
Storage Temperature	-30°C ~ 80°C
Power Input	DC 3.3V± 5%

3

## NT-18Neo

### 2MP Full HD Digital Necktie Design Camera Quick Guide

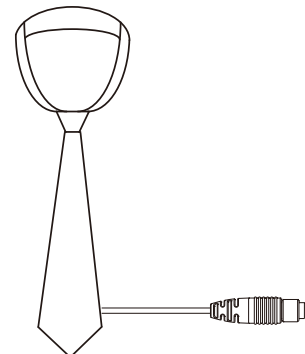

LawMate, innovation never stops

**LawMate®**

V1.0