


## MRIYA- covert HQ voice recorder in 5V/2A travel adapter

Superior voice recorder with patented **POWER SLEEP** technology for long-lasting HQ MP3 recording, built into a normal functional 5V / 2A travel adapter.

The adapter is fully functional, serving as the most normal charger for mobile phones, tablets or any 5V USB device.

Even the most detailed optical inspection cannot establish that something is installed inside. There are no lights, no moving parts, no screws and the device cannot be opened in any way except to be physically destroyed.

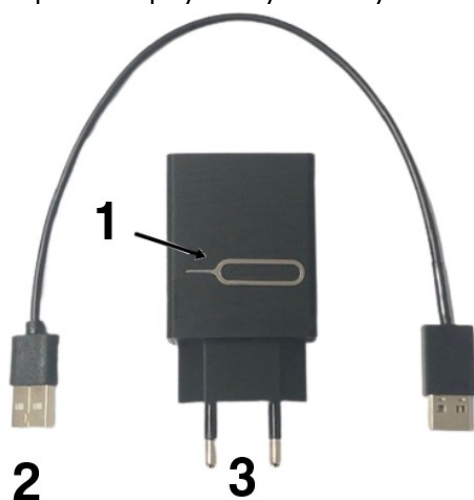

### What is in a box:

1. ON-OFF PIN
2. Coded USB cable for connecting to PC
3. MRIYA device



### How to turn recording ON:

Insert ON-OFF PIN in hole, push and release inner switch



### How to turn recording OFF:


Insert ON-OFF PIN in hole, push and release inner switch

### Connecting MRIYA to PC:

Insert Coded USB cable in MRIYA (MRIYA need to be in OFF position), then insert it in USB socket on your PC. Device will be recognized as MRIYA external device in My Computer section on your PC. If MRIYA is in ON (recording) state, device will not be recognized by PC.

### Setting basic recording parameters using the built-in software:

Open the MRIYA folder on your PC, find the setup.exe software and open it:

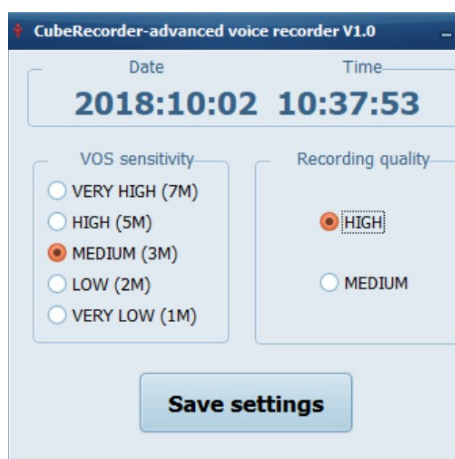

Here you can change the parameters of the voice activation sensitivity, recording quality and synchronize the date and time for future recordings.

In the left column (**VOS sensitivity**), select the activation sensitivity to sound. You can change it in 5 steps from very high to very low.

The higher is the sensitivity, the quieter voice will turn it on, and vice versa.

Indicatively, the data on the distance from the average speech, at which the device will turn on the recording, are given in brackets.

In the right column (**recording quality**), you can select the recording quality.

Maximum recording time in HIGH quality recording is 150 hours and in MEDIUM recording quality is 300 hours.

Finally, if the date and time information (taken from your computer) is correct, press **SAVE SETTINGS** and disconnect the coded USB cable from PC first. It is **VERY IMPORTANT** that you disconnect Coded USB cable from the PC side first.

The last step is very important, because the device will only remember the settings you entered by turning it off the computer.

### How to playback recorded files:

Connect MRIYA to PC as it is described above. Go to My Computer, find the device as **"MRIYA"**, open it, you will find all the recordings in the VOICE folder.

For an easier and more detailed view, turn on the detailed view option on your file explorer, you can ignore recordings that have less than 100 kb, these are probably isolated sounds that briefly turned on the recording.

The device records the time and date on each file, making it much easier for you to locate and select important recordings.

Click on the recording to listen to it and playback will start

Before you start a new recording, delete or save all the recordings from the recorder to your computer.

### How to charge batteries in MRIYA:

Batteries are charging when device is connected to PC with coded USB cable or when device is plugged in 220V socket.

If batteries are completely empty, it takes 4 hours to full charge

### Battery duration

	PLUGGED IN 220 V SOCKET	UNPLUGGED FROM 220V
RECORDING ( sound present)	300 hours / 150 hours	100 hours
STANDBY ( no sound)	Unlimited	2000 hours

### Technical specifications:

- 5V / 2A USB travel adapter with hidden HQ voice recorder inside
- MP3 recording format (128kbps)
- ALC preamplifier for superb recording even quiet conversations
- Voice activated recording ( adjustable sensitivity in 5 steps)
- Each recording is in a separate file
- Each recording has a date and time stamp
- Special PC software for adjusting recording quality, the sensitivity of activation to sound, date and time
- BLACK BOX design, without any marks , moving parts on the device for complete discretion
- Dimmensions : 70x44x23 mm
- Made in EU