


1. Install the “PV Cam Pro” App

There are 2 ways to install the **PV Cam Pro** app.

- (1) Scan the QR code:
Use your smartphone’s QR code scanner to the QR code on this page. The app will download automatically.



- (2) Download from the App Store or Google Play
A. Open the App Store (iOS) or Google Play Store (Android).
B. Search for “PV Cam Pro” and download the app.
C. Once the PV Cam Pro icon appears on your phone, the installation is complete.

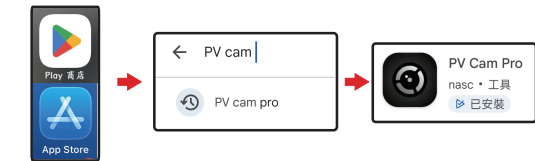

1

2. Configure Device Wi-Fi (P2P connection)

- (1) To connect your device with your phone, turn on the Wi-Fi function on your device.
(2) On your smartphone, go to **Settings > Wi-Fi** and enable Wi-Fi.



- (3) In the list of available Wi-Fi networks, locate the network name that matches the **Device ID** displayed on your device.
Example: the ID here is **R000005RDLKY**



- (4) Connect to the network and enter the default password “88888888”.




2

Note: If you opened the PV Cam Pro app before completing the Wi-Fi setup, close the app completely and reopen it after connecting to the device’s Wi-Fi network.

- (5) Launch the PV Cam Pro app.



- (6) Go to Device Management. Your camera should appear in the device list.
If the camera does not appear, tap the + icon in the upper-right corner. Choose one of the following methods to add the device.



Option A: Scan QR Code (Recommended)

Scan the QR code displayed on the device. This is the fastest way to add the camera.




Put the QR code of the device in the rectangular box

3

Option B: Manual Add

Tap **Manual Add**. Enter the **Device ID** and **Verification Code** displayed on the device. Tap **Confirm**.

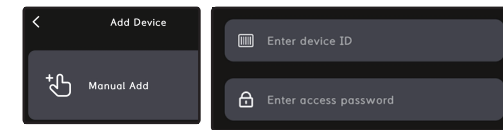


When the status **Device Online** appears in **Device Management**, the P2P Wi-Fi connection has been successfully established.

Note: If no device appears, refresh the device list, or return to the Main Menu and then reopen Device Management.

3. Synchronize the Time

Before recording for the first time, synchronize the time between your device and your smartphone. From the **Main Menu**, go to **Program Settings**. Tap **Sync Time**. When the synchronization is complete, the message “**Time Synchronized Successfully**” will appear on the screen.

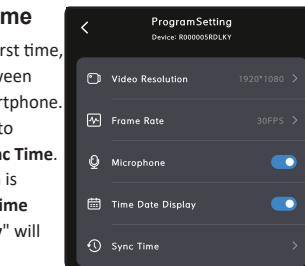

4

4. Change Device Code

For your security and privacy, do not use the default password. We strongly recommend changing it before using the device.

- (1) From the **Main Menu**, go to **Device Management**. Tap the gear icon next to the device you want to configure. Select **Modify Access Password**.




- (2) Enter the following information:

- Current Password
 - New Password
 - Confirm New Password
- Tap **Confirm** to save the new password.

Password Requirements

- Must be 8–16 characters long.
- Must contain both letters and numbers.
- Must include at least one uppercase letter.

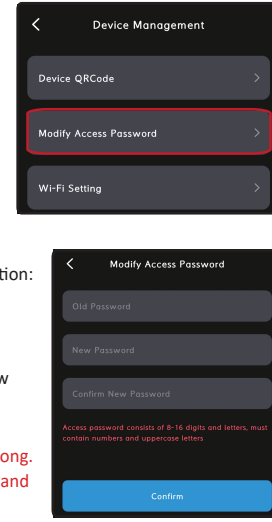


5

5. Configure Internet Wi-Fi (IP connection)

To access and control your device remotely over the Internet, please follow these steps:

- (1) Make sure the device has been added to the app and its status is **Online**. Tap the **Settings** (gear) icon next to the device, then select **Internet Wi-Fi Settings**.

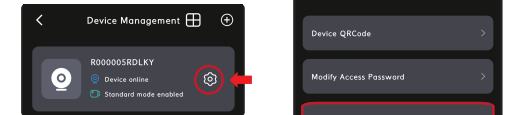


- (2) Select an available Wi-Fi network from the list, or manually enter the Wi-Fi network name (SSID) and password. Tap **Next**.

- (3) Check the LED indicator on the device to confirm that the Internet Wi-Fi (IP) connection has been established successfully.

Notes

- a. **Wi-Fi Network Name (SSID)**
Wi-Fi network name (SSID) must not contain spaces. If Wi-Fi name includes spaces, either rename your Wi-Fi network or enter without spaces.
Example:
Wi-Fi Name: LawMate International
Enter: LawMateInternational

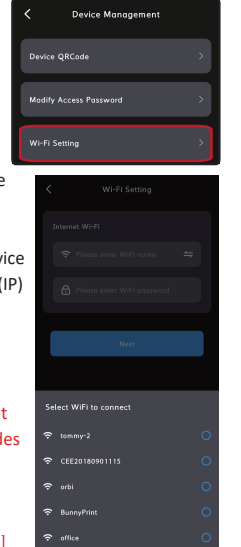

6

b. Automatic Reconnection

After the Internet Wi-Fi (IP) connection has been configured successfully, the device will remember the network and reconnect automatically whenever it is powered on.



c. Changing to a Different Wi-Fi Network

To connect the device to a different Wi-Fi network, restore the device to its factory default settings or follow the instructions on page 9.

6. Stream Live View

Once the Internet Wi-Fi (IP) connection has been established, you can remotely control the camera and view live video.


- (1) Go to **Device Management** and tap the device you want to access.
(2) From the **Main Menu**, open **Record Settings**. The live view will be displayed.
(3) To start recording:
• Tap **REC** in the Device section to save recordings to the device's memory card.
• Tap **REC** in the Local section to save recordings directly to your smartphone or tablet.

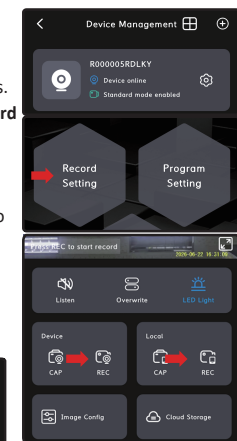


7

- (4) When recording starts, the REC button will turn blue. Tap it again to stop recording.

- (5) To change the recording mode, tap **STOP** to end the current recording, then select the desired recording mode.




- (6) To capture a snapshot: Tap **STOP** first, then tap **CAP**. Choose whether to save the image to memory card or your smartphone before capturing the snapshot.



- (7) To enable continuous recording with automatic overwrite, tap **Overwrite**.
Note:
Entering Program Settings will temporarily pause recording. Recording will resume automatically when you exit the settings menu.

- (8) Multi-Device View


- a. Go to **Device Management**.
b. Tap the **Multi-View** icon next to the page title.
c. Tap the + icon and select the devices you want to display. You can tap to enlarge its live view.

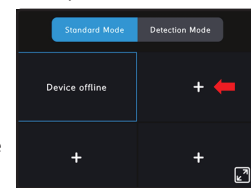

8


- (9) Image Settings

- To adjust the camera image:
a. Go to Record Settings.
b. Tap Image Settings.
c. You can adjust:
Brightness / Contrast / Horizontal Flip / Vertical Flip




7. Download Videos and Photos

- (1) To save videos or photos to your smartphone, go to **Video Files** from the **Main Menu**.
(2) Locate the file you want to download, then tap the **Download** icon next to it.
(3) After the download is complete, go to **Backup Files** to verify that the file has been successfully saved to your smartphone.
(4) To prevent a file from being overwritten or deleted, tap the **Lock** icon next to the file. The icon will change to indicate that the file is protected.



8. Change Internet Wi-Fi (IP connection) Setting

- (1) Make sure your smartphone and the device are connected to the same Wi-Fi network.
(2) Go to **Main Menu > Device Management**, tap the Settings (gear) icon, and then select **Wi-Fi Setting**.



9

- (3) To disable the Internet Wi-Fi (IP) connection, switch it **Off**. The device will automatically return to P2P mode.
(4) To connect the device to a different Wi-Fi network, enter the new **SSID** and **password**, then tap **Next**.

- Notes**
a. **Device Relocation**
If you have moved the device to a different location and cannot complete Step 1, restore the device to its factory default settings and repeat the setup process starting from Section 2.
b. “Internet Wi-Fi Setting Not Supported” Message
If the message “Internet Wi-Fi Setting Not Supported” appears, make sure that your smartphone and the device are connected to the same Wi-Fi network before changing the settings.

9. Turn off Motion Detection Notification

- Android
(1) Open **Settings** on your smartphone. (2) Tap **Apps**.
(3) Select **PV Cam Pro**. (4) Tap **Notifications**, turn notifications Off.
iOS
(1) Open **Settings**. (2) Tap **Notifications**.
(3) Select **PV Cam Pro**. (4) Turn **Allow Notifications** Off.

10. Trouble Shooting

Why does the message “Not Supported” appear when I try to change certain settings?

Some settings are only available under specific connection modes:

- **SSID Visibility** and **Change Device Wi-Fi Password** can only be configured while the device is connected in **P2P** mode.
- **Format SD Card** is only available when your smartphone and the device are connected to the **same Wi-Fi network**.

10

PV Cam Pro for IP Cam App Store/Play Store Installation Quick Guide



LawMate, innovation never stops

LawMate®

V1.0